


TERMINAL BLOCKS (Polyethylene)

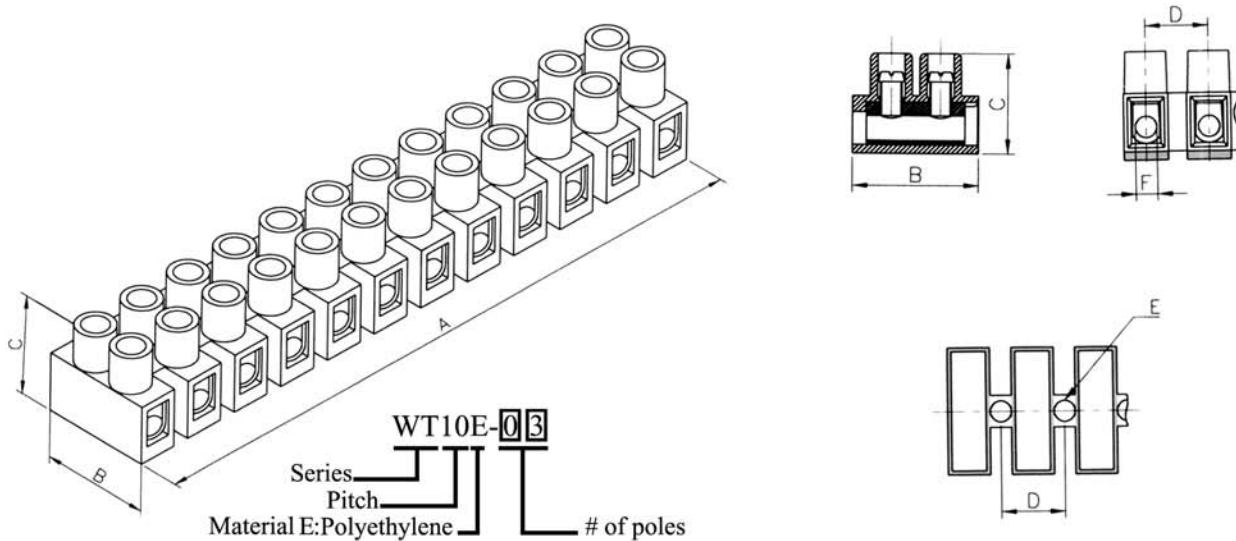

Dimensions & Data :

Part #	Nominal Sizes	Amp	Volt.	Screw	Dimensions (mm/in.)						Packing	
					Unit	A	B	C	D	E		F
WT8E-□□	2.5 mm ²	6A	400V	M2.6x5	(mm)	96.20	16.30	14.50	8.00	2.90	2.80	50 Pcs/Bag.
					(in)	3.780	0.642	0.571	0.315	0.114	0.110	500 Pcs/Carton
WT10E-□□	4.0 mm ²	10A	400V	M3.0x6	(mm)	117.2	20.10	17.00	10.00	3.60	3.40	50 Pcs/Bag.
					(in)	4.614	0.791	0.669	0.394	0.142	0.134	500 Pcs/Carton
WT12E-□□	6.0 mm ²	16A	400V	M3.5x7	(mm)	140.5	23.80	19.80	12.20	3.80	3.90	50 Pcs/Bag.
					(in)	5.540	0.937	0.780	0.480	0.15	0.154	400 Pcs/Carton
WT14E-□□	10.0 mm ²	32A	400V	M4.0x9	(mm)	158.0	25.60	25.40	13.50	4.30	4.80	25 Pcs/Bag.
					(in)	6.220	1.008	1.000	0.531	0.169	0.189	250Pcs/Carton

Description :

- *Base : With 0.8 - 1.2mm raised base.
- *Material : Polyethylene (PE).
- *Working Temperature : 80°C.
- * Terminal Insert : Brass metal alloy, nickel plated.
- * Screws : Zinc plated, yellow chromed.
- * Poles Available : 12 Poles.
- * Easy Self-Cutting design makes users easier to break the Terminal blocks into desired numbers of pole.
- * Specific packing and private labeling required are available upon request.