


TERMINAL BLOCKS (H Type)

(With 1.2 mm raised base)

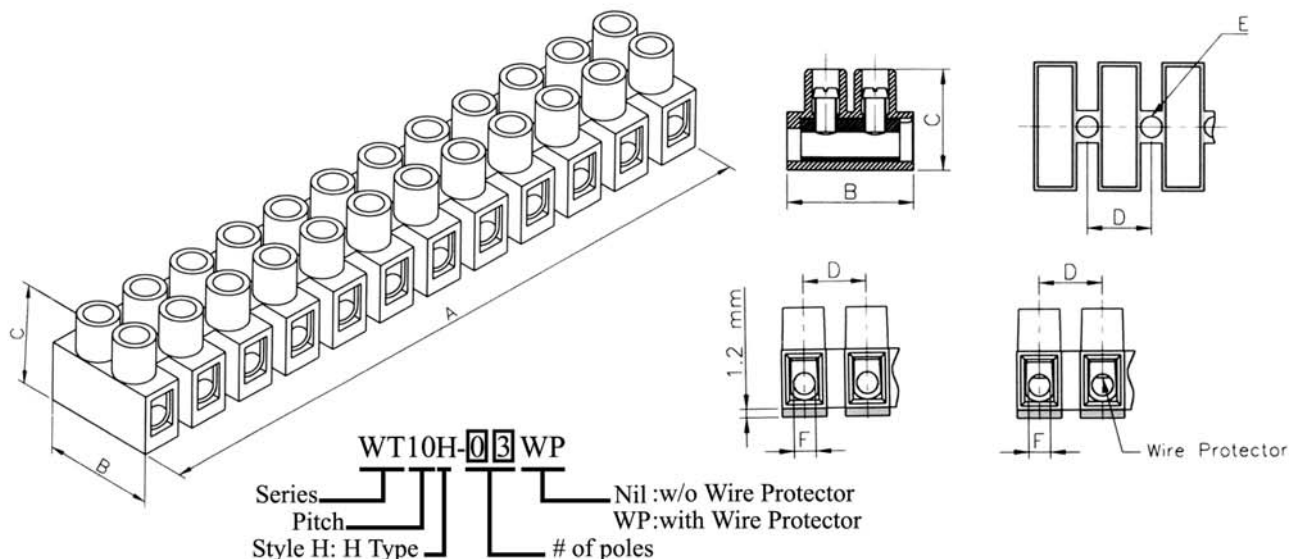

Dimensions & Data :

Part #	mm ²	Amp	Volt.	Screw	Dimensions (mm/in.)						Packing	
					Unit	A	B	C	D	E		F
WT8H-□□	1.5	17.5A	450V	M2.6×5	(mm)	96.20	17.00	14.50	8.00	2.90	2.8±0.1	50 Pcs/Bag.
					(in)	3.787	0.669	0.570	0.315	0.114	0.110	500 Pcs/Carton
WT8H-□□WP	1.5	17.5A	450V	M2.6×5	(mm)	96.20	17.00	14.50	8.00	2.90	2.8±0.1	50 Pcs/Bag.
					(in)	3.787	0.669	0.570	0.315	0.114	0.110	500 Pcs/Carton
WT10H-□□	2.5	24A	450V	M3.0×6	(mm)	117.0	20.20	17.00	10.00	3.60	3.4±0.1	50 Pcs/Bag.
					(in)	4.626	0.795	0.670	0.394	0.142	0.134	500 Pcs/Carton
WT10H-□□WP	2.5	24A	450V	M3.0×6	(mm)	117.0	20.20	17.00	10.00	3.60	3.4±0.1	50 Pcs/Bag.
					(in)	4.626	0.795	0.670	0.394	0.142	0.134	500 Pcs/Carton

Description :

*Base : With 1.2mm raised base.

*Material : Polyamide 66 (Nylon 66), UL 94V2, Natural.

*Working Temperature : 110°C.

* Number of Poles : 12 poles.

* Terminal Insert : Brass metal alloy, nickel plated.

* Wire Protector (WP) : Stainless spring steel.

* Screws : Zinc plated, yellow chromed.

* Stripping Length : WT8H - 5.3mm (0.21 in)


WT10H - 7.3mm (0.29 in)

International Approvals :

Part #	Germany 	U.S.A. 	Sweden 	Canada 	Denmark 	Norway 	Finland 	Holland 	Austria 	Belgium 	Switzerland
WT8H-□□	450V/17.5A	600V/20A	450V	400V/10A	400V	400V	400V	400V	400V	400V	400V
WT8H-□□WP	1.5 mm ²	12-22AWG	1.5 mm ²	18-20AWG	1.5 mm ²	1.5 mm ²	1.5 mm ²	1.5 mm ²	1.5 mm ²	1.5 mm ²	1.5 mm ²
WT10H-□□	450V/24A	600V/30A	450V	400V/20A	400V	400V	400V	400V	400V	400V	400V
WT10H-□□WP	2.5 mm ²	10-22AWG	2.5 mm ²	14-18AWG	2.5 mm ²	2.5 mm ²	2.5 mm ²	2.5 mm ²	2.5 mm ²	2.5 mm ²	2.5 mm ²

TERMINAL BLOCKS (H TYPE)

(With 1.2 mm raised base)

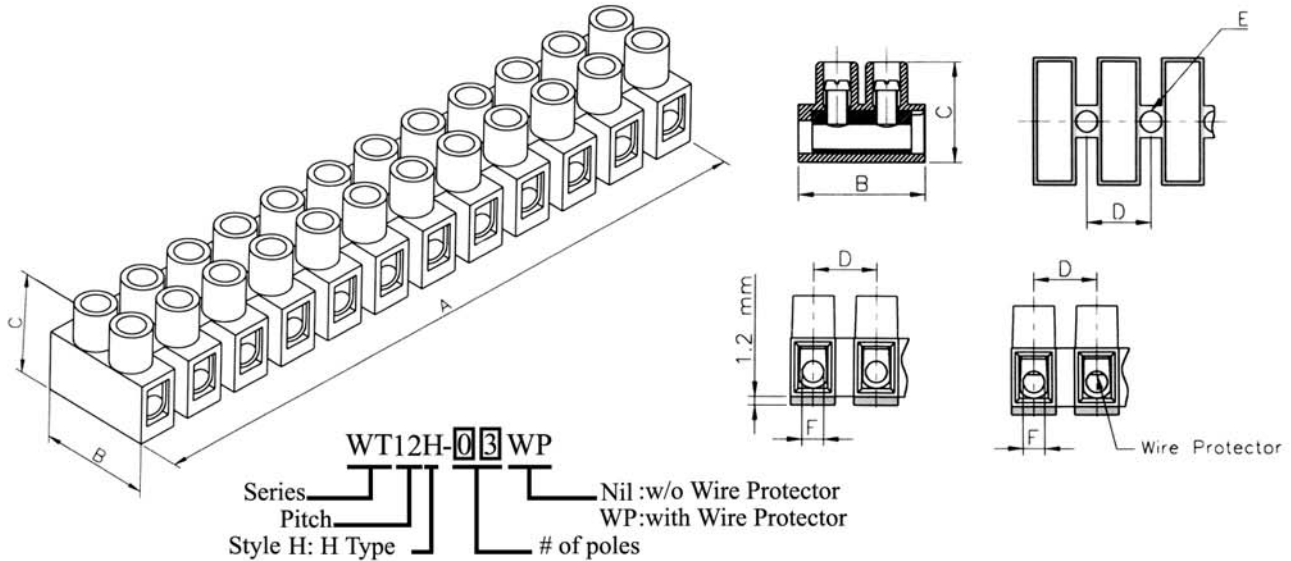

Dimensions & Data :

Part #	mm ²	Amp	Volt.	Screw	Dimensions (mm/in.)						Packing	
					Unit	A	B	C	D	E		F
WT12H-□□	6.0	41A	500V	M3.5×7	(mm)	140.7	23.80	19.00	12.00	3.90	4.2±0.1	40 Pcs/Bag.
					(in)	5.540	0.937	0.748	0.472	0.154	0.154	400 Pcs/Carton
WT12H-□□WP	6.0	41A	500V	M3.5×7	(mm)	140.7	23.80	19.00	12.00	3.90	4.2±0.1	40 Pcs/Bag.
					(in)	5.540	0.937	0.748	0.472	0.154	0.154	400 Pcs/Carton
WT14H-□□	10.0	57A	500V	M4×9	(mm)	158.0	25.60	25.20	13.50	4.40	5.0±0.1	25 Pcs/Bag.
					(in)	6.220	1.008	0.992	0.531	0.173	0.189	250 Pcs/Carton
WT14H-□□WP	10.0	57A	500V	M4×9	(mm)	158.0	25.60	25.20	13.50	4.40	5.0±0.1	25 Pcs/Bag.
					(in)	6.220	1.008	0.992	0.531	0.173	0.189	250 Pcs/Carton

Description :

- * Base : With 1.2mm raised base.
- * Material : Polyamide 66 (Nylon 66), UL 94V2, Natural.
- * Working temperature) : 110°C.
- * Number of Poles : 12 poles.

- * Terminal Insert : Brass metal alloy, nickel plated.
- * Wire Protector (WP) : Stainless spring steel.
- * Screws : Zinc plated, yellow chromed.
- * Stripping Length : WT12H - 7.8 mm (0.31 in)
WT14H - 9.0 mm (0.35 in)

International Approvals :

Part #	Germany 	U.S.A. 	Sweden 	Canada 	Finland 	Norway 	Denmark 	Holland 	Austria 	Belgium 	Italy 	Switzerland
WT12H-□□	500V/41A	600V/35A	500V	CUL	500V							
WT12H-□□WP	6.0 mm ²	10-22AWG	6.0 mm ²	Approved	6.0 mm ²							
WT14H-□□	500V/57A	600V/50A	500V	CUL	500V							
WT14H-□□WP	10.0 mm ²	8-20AWG	10.0 mm ²	Approved	10.0 mm ²							