Pro Components

TB259 SERIES

TB259 * * TB259 * * 1

Pitch=3.5mm Pitch=7.0mm

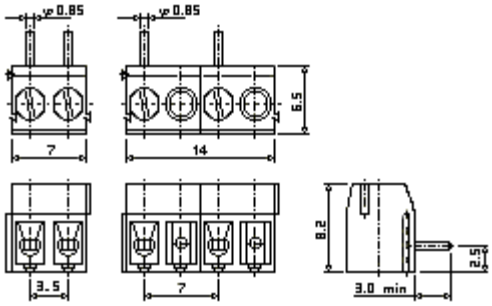

SPECIFICATIONS

Pitch	3.5 mm, 7.0 mm
Wire range	18 AWG to 28 AWG
No. of pole per Block	2 or 3
Rated	10 Amp, 300 VAC
Housing	Polyamide 66,Blue
Terminals	Tin plated over Brass
Screws	M2.0 x 0.4P,Yellow Chromated Zinc plated over Steel
Wire protector	Stainless Steel

mm to inch **NUMBER OF POLE 02~30

mm	0.5	0.85	0.9	2.5	3	3.5	6.5	7	7.3	8.2	8.5	14			
inch	0.02	0.033	0.035	0.098	0.118	0.138	0.256	0.276	0.287	0.323	0.335	0.551			

FEATURES

- Easy to assemble for any number of positions.
- End stackable without any loss of P.C.B. space.
- Special wire protector design to ensure reliable wire clamping.
- UL 94V-0 fire retardant engineering plastic used for the housing.
- Be capable of clamping a wide range of wire diameters.
- Compact size for P.C.B.

PART NUMBERING SYSTEM

```
TB   259 02  0  X  X  XX
 |    |   |  |  |  |   |
 |    |   |  |  |  |   +-------- Special number
 |    |   |  |  |  +------- Screw type:
 |    |   |  |  |             0:"+" screw
 |    |   |  |  |             1:"-" screw
 |    |   |  |  +------- Housing color:
 |    |   |  |             B:Bule, G:Green,
 |    |   |  |             K:Black
 |    |   |  +------ Pitch:
 |    |   |             0:Standard pitch
 |    |   |             1:Standard pitch×2
 |    |   +----- Number of pins
 |    +---- Series: Dimensions and rated
 +--- Model
```