


Pro Components

TB300 SERIES (MOUNT TYPE)

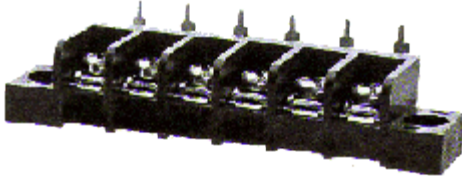

SPECIFICATIONS:

PITCH 9.5 mm

HOUSING MATERIAL:

THERMOPLASTIC (UL 94V-0) BLACK

TERMINALS: BRASS TIN PLATED

SCREWS: STEEL NICKEL PLATED

WIRE RANGE : 14AWG TO 22AWG


RATED: 15AMP 300VAC


DIELECTRIC STRENGTH: 2000 VAC (Min.)

INSULATION RESISTANCE: 1000MΩ, 500VDC

PITCH=9.5mm (0.374inch)

WIRE RANGE: 14-22 AWG

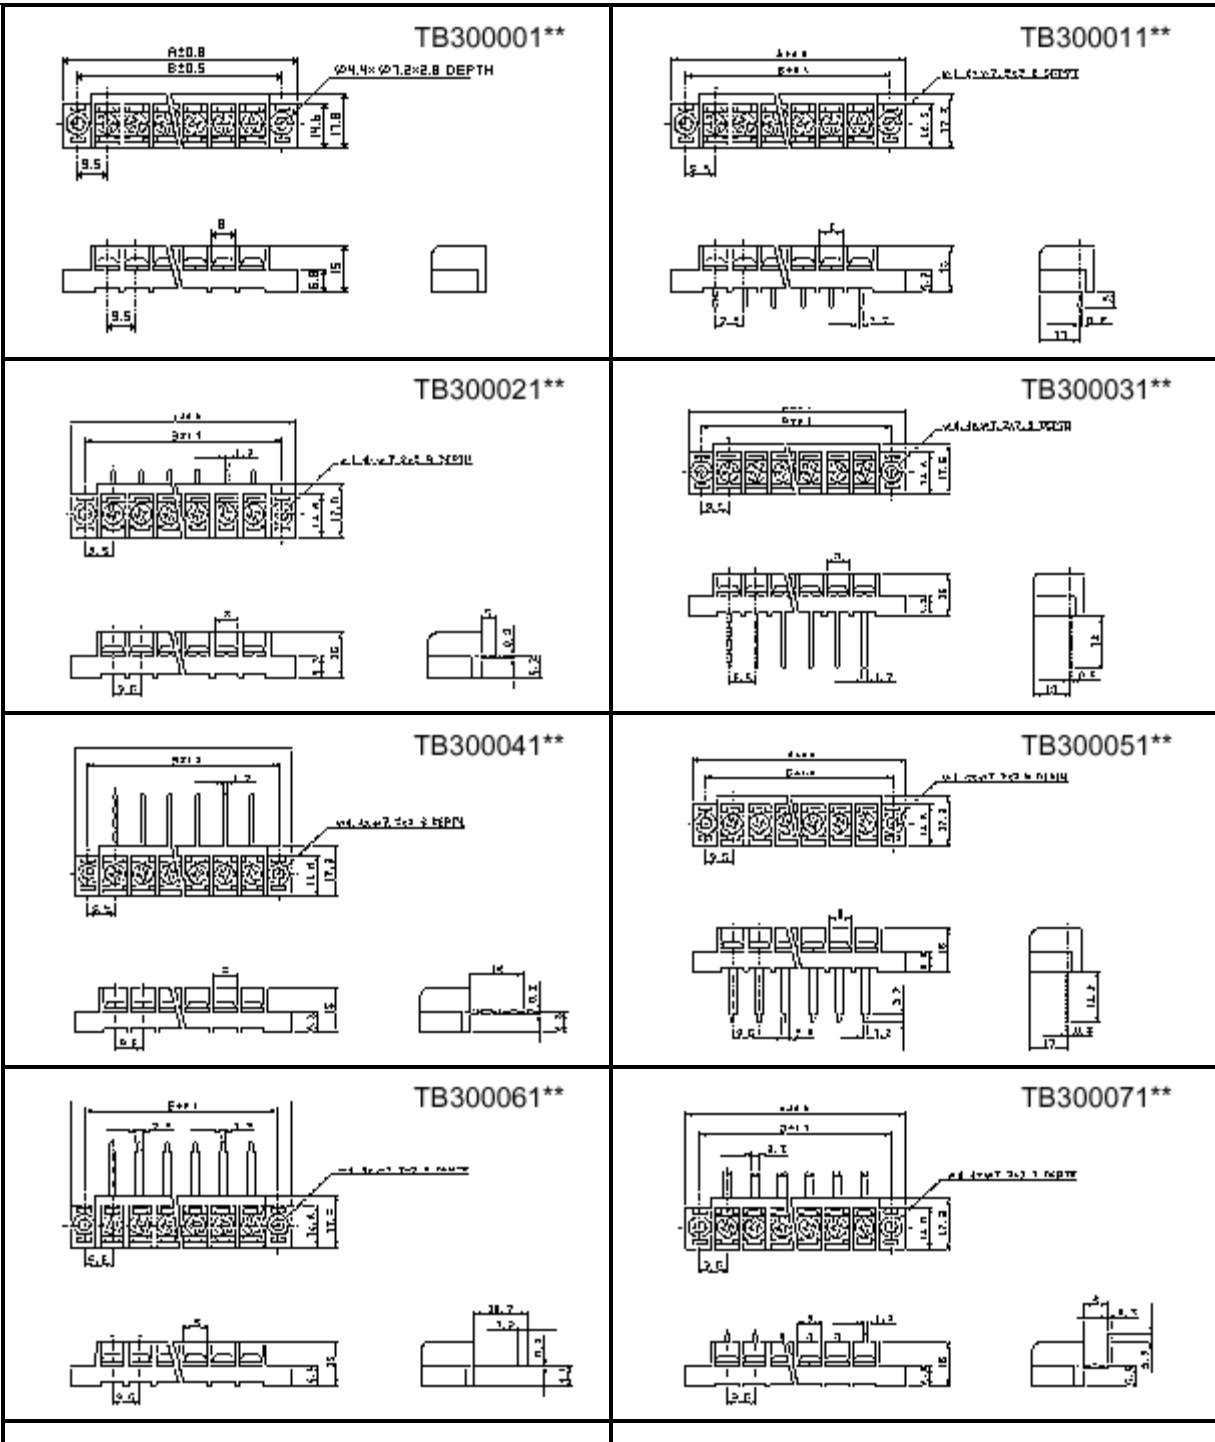

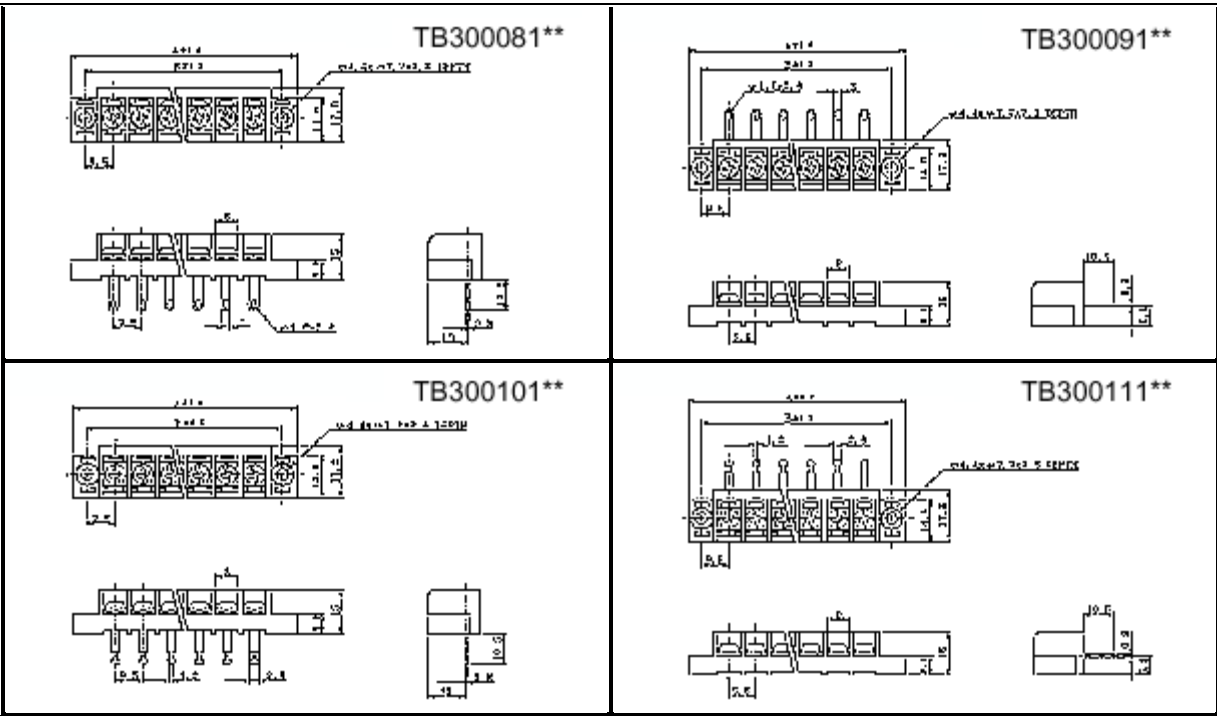

mm to inch

mm	0.8	1.2	1.6	2.8	3	3.2	4.4	5	6.8	7.2	8
inch	0.031	0.047	0.063	0.110	0.118	0.126	0.173	0.197	0.268	0.283	0.315
mm	9.5	10.5	13	14.6	15	17.8	18	18.2			
inch	0.374	0.413	0.512	0.575	0.591	0.701	0.709	0.717			

DIMENSIONS: mm(inch)

**NUMBER OF POLE 02~30

Pole	2	3	4	5	6	7	8	9	10	11	12
A	38	47.5	57	66.5	76	85.5	95	104.5	114	123.5	133
±0.8	(1.496)	(1.870)	(2.244)	(2.618)	(2.992)	(3.366)	(3.740)	(4.114)	(4.488)	(4.862)	(5.236)
B	28.5	38	47.5	57	66.5	76	85.5	95	104.5	114	123.5
±0.5	(1.122)	(1.496)	(1.870)	(2.244)	(2.618)	(2.992)	(3.366)	(3.740)	(4.114)	(4.488)	(4.862)
Pole	13	14	15	16	17	18	19	20	21	22	23
A	142.5	152	161.5	171	180.5	190	199.5	209	218.5	228	237.5
±0.8	(5.610)	(5.984)	(6.358)	(6.732)	(7.106)	(7.480)	(7.854)	(8.228)	(8.602)	(8.976)	(9.350)
B	133	142.5	152	161.5	171	180.5	190	199.5	209	218.5	228
±0.5	(5.236)	(5.610)	(5.984)	(6.358)	(6.732)	(7.106)	(7.480)	(7.854)	(8.228)	(8.602)	(8.976)
Pole	24	25	26	27	28	29	30				
A	247	256.5	266	275.5	285	294.5	304				
±0.8	(9.724)	(10.098)	(10.472)	(10.846)	(11.220)	(11.594)	(11.969)				
B	237.5	247	256.5	266	275.5	285	294.5				
±0.5	(9.350)	(9.724)	(10.098)	(10.472)	(10.846)	(11.220)	(11.594)				

PART NUMBERING SYSTEM

<u>TB</u>	<u>300</u>	<u>01</u>	<u>1</u>	<u>02</u>	<u>XX</u>	
						+----- Special number
						+----- Number of pole
						+----- Housing type
						1:Mount type
						2:Barrier type
						+--- Terminal type
						+--- Series
						+--- Model