


Pro Components

TB301 SERIES (MOUNT TYPE)

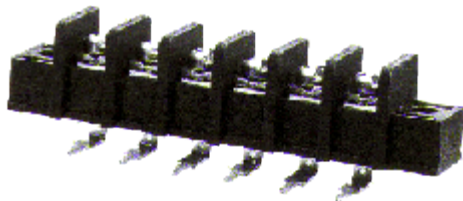

SPECIFICATIONS:

PITCH 8.25 mm

HOUSING MATERIAL:

THERMOPLASTIC (UL 94V-0) BLACK

TERMINALS: BRASS TIN PLATED

SCREWS: STEEL NICKEL PLATED


WIRE RANGE : 14AWG TO 22AWG


RATED: 15AMP 300VAC

DIELECTRIC STRENGTH: 2000 VAC (Min.)

INSULATION RESISTANCE: 1000MΩ, 500VDC

PITCH=8.25mm (0.325inch)
WIRE RANGE: 14-22 AWG

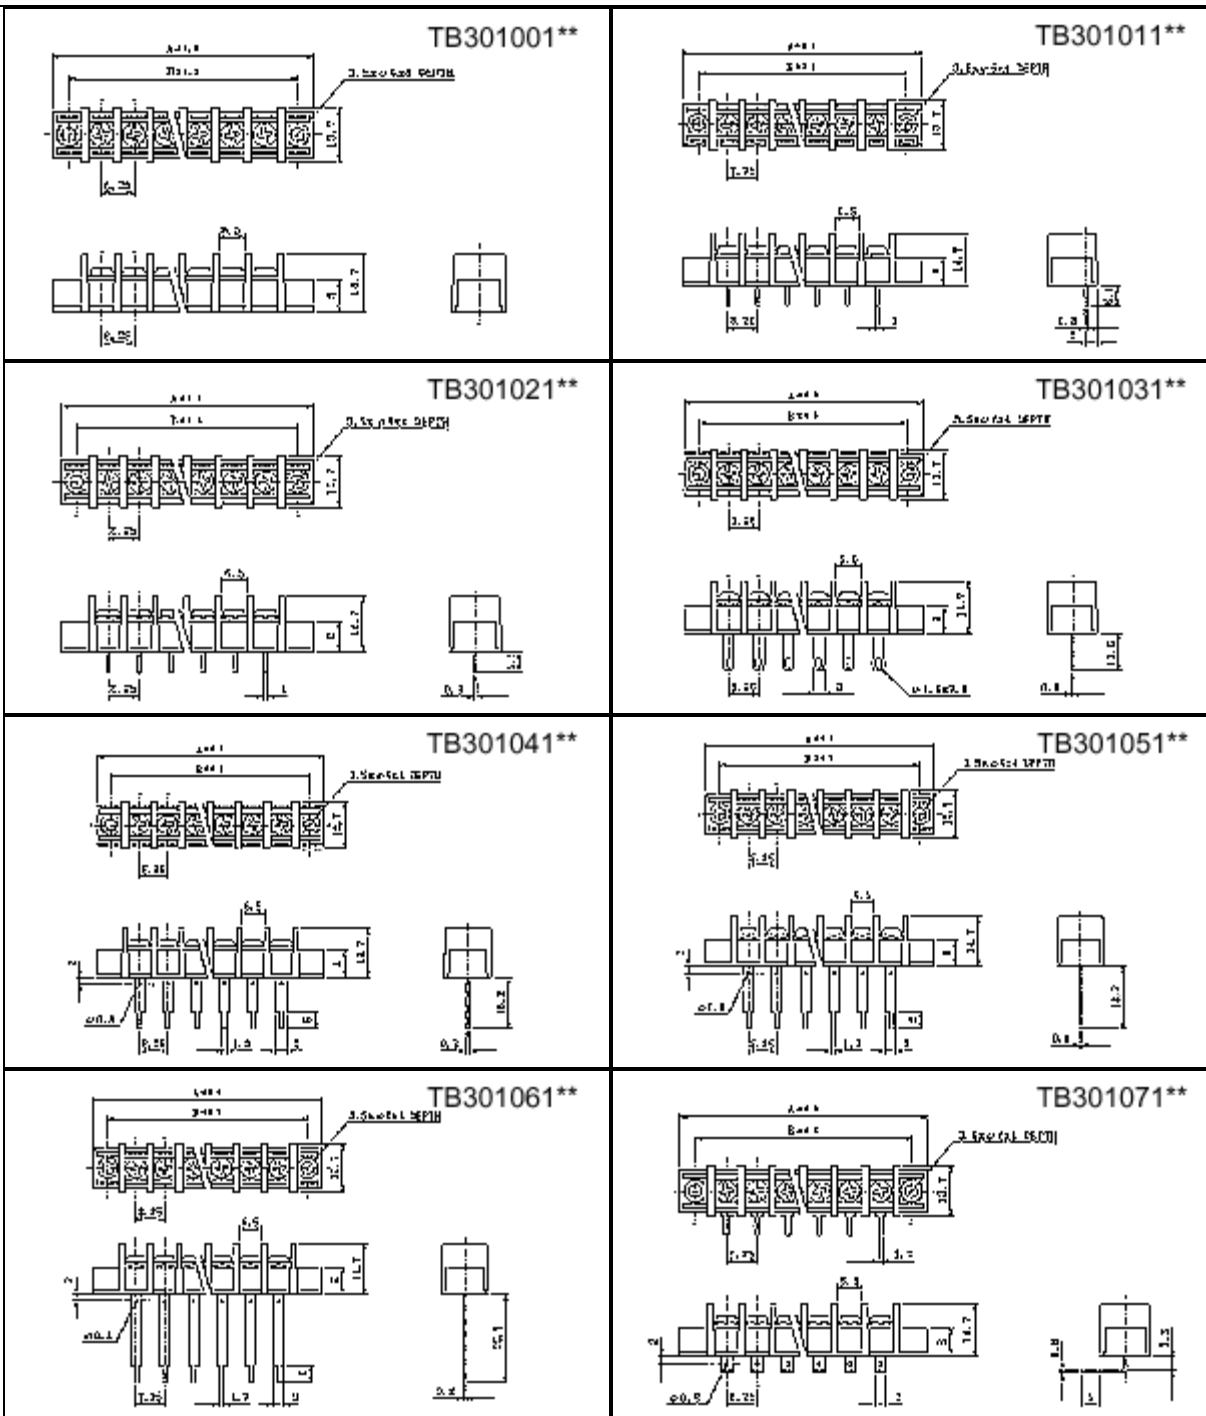

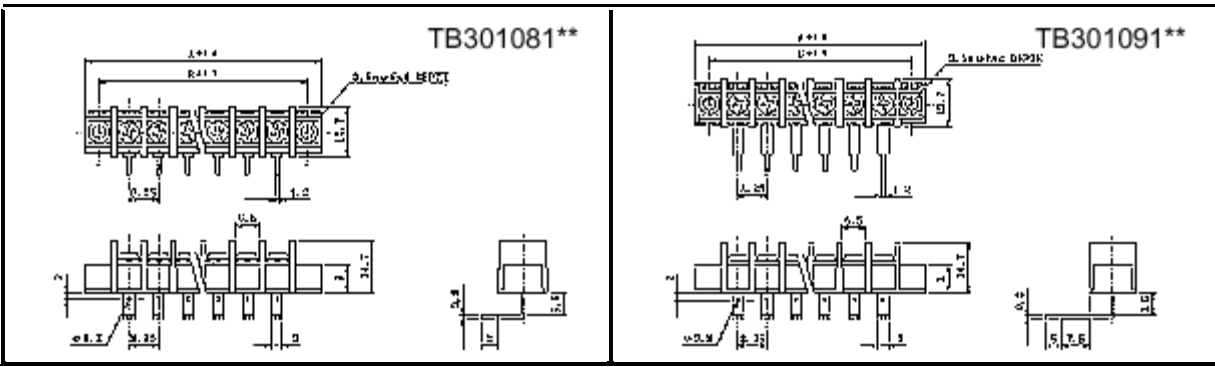

mm to inch

mm	0.8	1	1.2	1.6	2	2.8	3	3.5	4	5	5.5
inch	0.031	0.039	0.047	0.063	0.079	0.110	0.118	0.138	0.157	0.197	0.217
mm	6	6.5	7.5	8	8.25	10.5	13.7	14.7	15.2	18.2	25.7
inch	0.236	0.256	0.295	0.315	0.325	0.413	0.539	0.579	0.598	0.717	1.012

DIMENSIONS: mm(inch)

**NUMBER OF POLE 02~30

Pole	2	3	4	5	6	7	8	9	10	11	12
A	33	41.3	49.5	57.8	66	74.3	82.5	90.8	99	107.3	115.5
±0.8	(1.299)	(1.626)	(1.949)	(2.276)	(2.598)	(2.925)	(3.248)	(3.575)	(3.898)	(4.224)	(4.547)
B	24.75	33	41.3	49.5	57.8	66	74.3	82.5	90.8	99	107.3
±0.5	(0.974)	(1.299)	(1.626)	(1.949)	(2.276)	(2.598)	(2.925)	(3.248)	(3.575)	(3.898)	(4.224)
Pole	13	14	15	16	17	18	19	20	21	22	23
A	123.8	132	140.3	148.5	156.8	165	173.3	181.5	189.8	198	206.3
±0.8	(4.874)	(5.197)	(5.524)	(5.846)	(6.173)	(6.496)	(6.823)	(7.146)	(7.472)	(7.795)	(8.122)
B	115.5	123.8	132	140.3	148.5	156.8	165	173.3	181.5	189.8	198
±0.5	(4.547)	(4.874)	(5.197)	(5.524)	(5.846)	(6.173)	(6.496)	(6.823)	(7.146)	(7.472)	(7.795)
Pole	24	25	26	27	28	29	30				
A	214.5	222.8	231	239.3	247.5	255.8	264				
±0.8	(8.445)	(8.772)	(9.094)	(9.421)	(9.744)	(10.071)	(10.394)				
B	206.3	214.5	222.8	231	239.3	247.5	255.8				
±0.5	(8.122)	(8.445)	(8.772)	(9.094)	(9.421)	(9.744)	(10.071)				

PART NUMBERING SYSTEM

TB 301 01 1 02 XX
 | | | | |
 +----- Special number
 +----- Number of pole
 +----- Housing type
 1:Mount type
 2:Barrier type
 +--- Terminal type
 +--- Series
 +--- Model