

Pro Components

TB305 SERIES (BARRIER TYPE)

UL Pending



SPECIFICATIONS:

PITCH 6.35 mm

HOUSING MATERIAL:

THERMOPLASTIC (UL 94V-0) BLACK

TERMINALS: BRASS TIN PLATED

SCREWS: STEEL NICKEL PLATED


WIRE RANGE : 18AWG TO 22AWG

RATED: 10AMP, 300VAC

DIELECTRIC STRENGTH: 2000 VAC (Min.)

INSULATION RESISTANCE: 1000M Ω , 500VDC

PITCH=6.35mm (0.25inch)
WIRE RANGE: 18-22 AWG

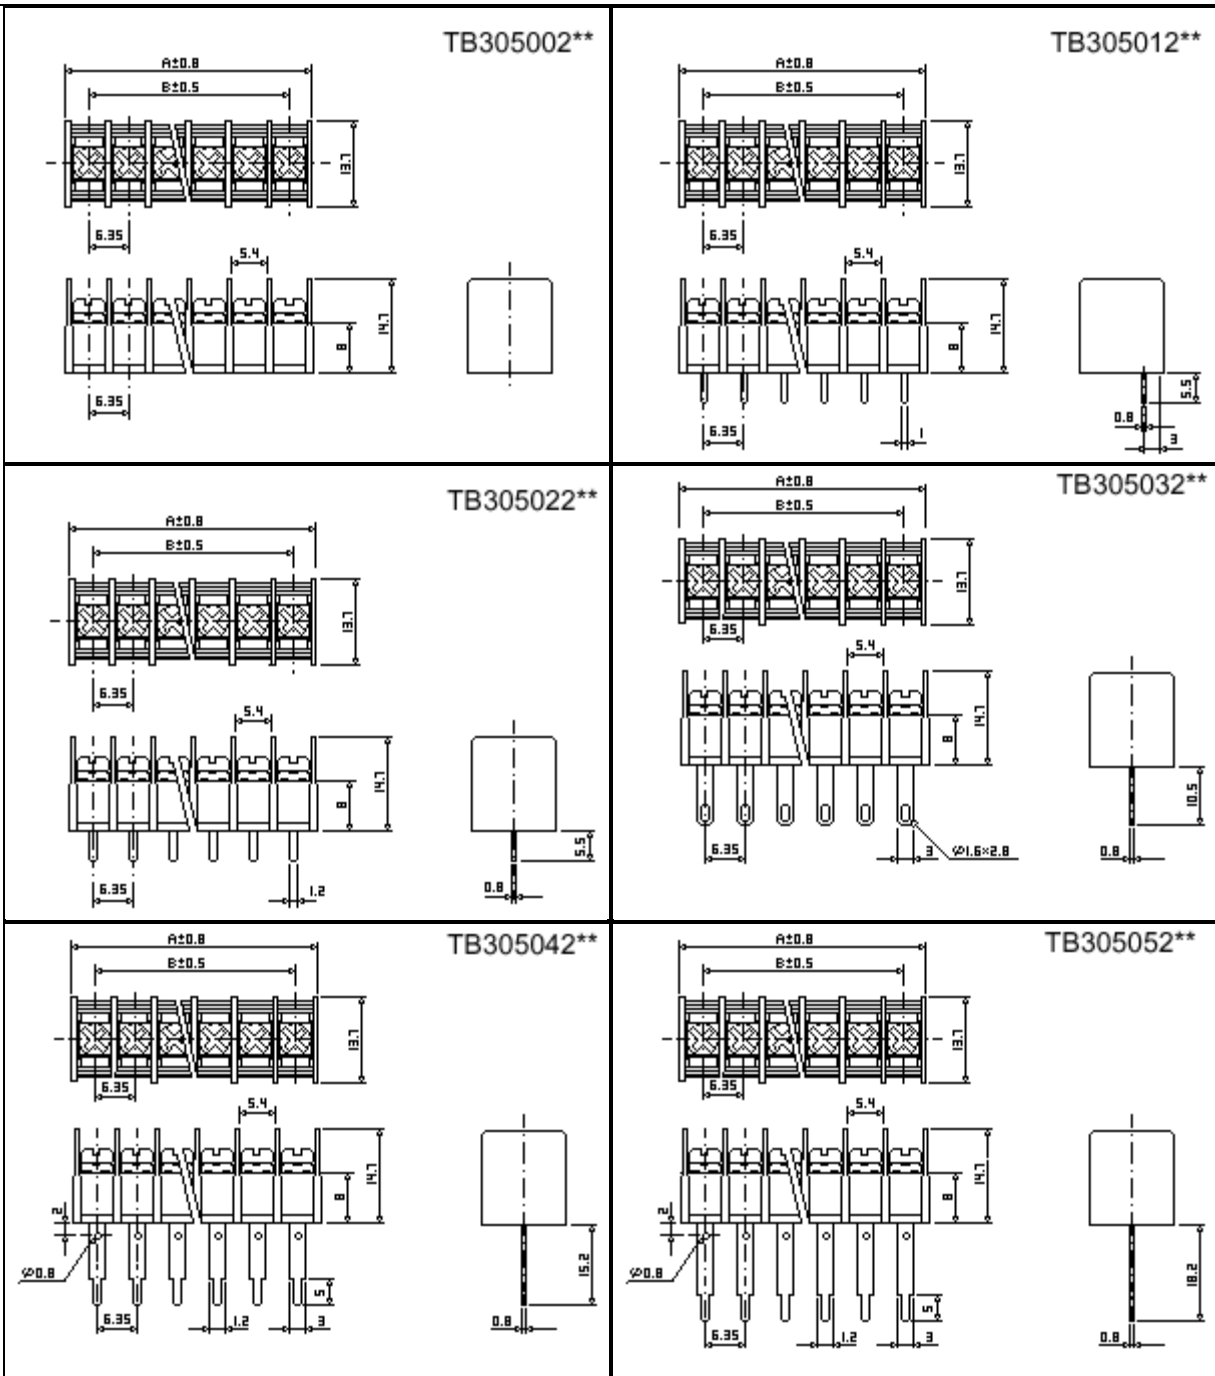

PART NUMBERING SYSTEM

<u>TB</u>	<u>305</u>	<u>01</u>	<u>1</u>	<u>02</u>	<u>XX</u>	
						+----- Special number
						+----- Number of pole
						+----- Housing type
						1:Mount type
						2:Barrier type
						+--- Terminal type
						+--- Series
						+--- Model