

Pro Components

TB306 SERIES (Mount ends with cover type/ Dovetail with cover type)

UL Pending



TB306

SPECIFICATIONS:

HOUSING MATERIAL:

POLYAMIDE 66 RESIN (UL 94V-0)


TERMINALS: TIN PLATED OVER BRASS

SCREWS: NICKEL PLATED OVER STEEL

DIELECTRIC STRENGTH: 2000 VAC (Min.)

INSULATION RESISTANCE: 1000MΩ, 500VDC

PITCH=7.62mm (0.3inch)
WIRE RANGE: 16-22 AWG

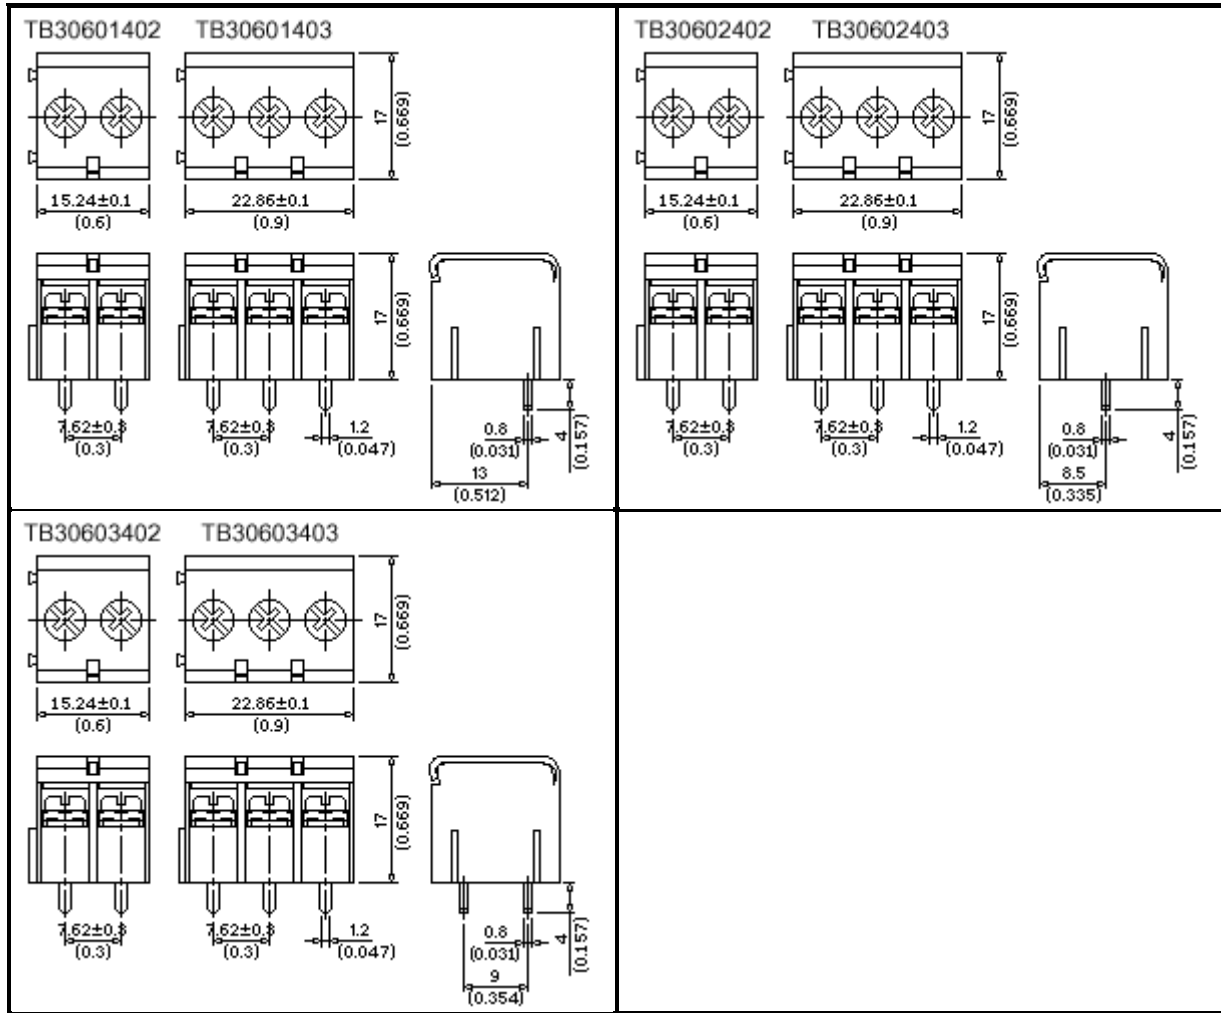

PART NUMBERING SYSTEM

TB 306 01 4 02 XX

- Special number
- +----- Number of pole
- +----- Housing type
- 3:Mount ends with cover type
- 4:Dovetail with cover type
- +--- Terminal type
- +--- Series
- +--- Model