Pro Components *TB269 series*



SPECIFICATIONS

Pitch	5.0 mm, 10.0 mm.
Wire range	14 AWG to 22 AWG.
No. of pole per Block	2Px2 or 3Px2
Rated	10 Amp, 300 VAC
Housing	Polyamide 66, Blue
Terminals	Tin plated over Brass
Screws	M2.5 x 0.45P, Yellow Chromated
	Zinc plated over Steel
Wire cage	Nickel plated over Zinc Alloy

mm to inch


**NUMBER OF POLE 02~30

mm	0.5	0.8	0.9	1	1.3	3	3.5	4.05	4.4	5	5.5	7	9.3
inch	0.02	0.031	0.035	0.039	0.051	0.118	0.138	0.159	0.173	0.197	0.217	0.276	0.366
mm	10	10.8	12.5	13.5	13.8	15.5	18.3	19.1	20	21.9	22.5	25.2	
inch	0.394	0.425	0.492	0.531	0.543	0.61	0.72	0.752	0.787	0.862	0.886	0.992	

FEATURES

- Easy to assemble for any number of positions.
- End stackable without any loss of P.C.B. space.
- Special wire protector design to ensure reliable wire clamping.
- UL 94V-0 fire retardant engineering plastic used for the housing.
- Be capable of clamping a wide range of wire diameters.
- Compact size for P.C.B.

PART NUMBERING SYSTEM

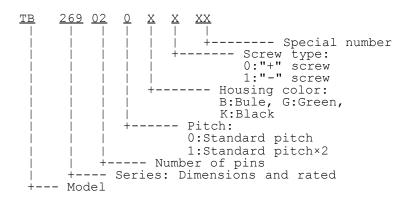

tüv **91**

TB269 * *	TB269 * * 1
	D11 1 40.0

Pitch=5.0mm Pitch=10.0mm

CLAMPING

